

Model No.: **GP386F**

Description : Mercury and Lead Free button cell

Chemical System : Zinc/Silver Oxide

Nominal Voltage : 1.55V

Nominal Dimension : $\Phi 11.60\text{mm} \times 4.20\text{mm}$

Applications : Analog watch

Average Weight : 1.70g

Shelf Life : Not less than 90% of the service capacity within first year storage at $20 \pm 2^\circ\text{C}$ $55 \pm 20\% \text{RH}$; Warranty 1 year.

Date Code : Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.


Close Circuit Voltage : 1.30 V(min.) (load resistor 200Ω at $20 \pm 2^\circ\text{C}$ for 0.1 to 2 seconds)

Nominal Service Life : 230hrs (load $3.0\text{ k}\Omega$ to cut off 1.2V under $20 \pm 2^\circ\text{C}$)

Average Service Capacity : 120mAh (load $3.0\text{ k}\Omega$ to cut off 1.2V under $20 \pm 2^\circ\text{C}$)

Cross References:

IEC	Maxell	Duracell	Others
SR43	SR43W	D386	V386

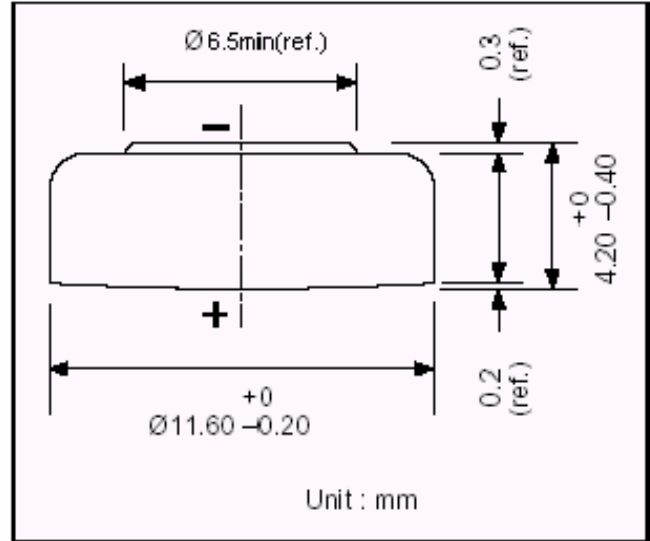

Typical Discharge curve at $20 \pm 2^\circ\text{C}$

