

Model No.: **GP389F**

Description : Mercury and Lead Free button cell

Chemical System : Zinc/Silver Oxide

Nominal Voltage : 1.55V


Nominal Dimension : Φ 11.60mm \times 3.05mm

Applications : Analog watch

Average Weight : 1.10 g

Shelf Life : Not less than 90% of the service capacity within first year storage at 20 ± 2 °C 55 \pm 20 %RH; Warranty 1 year.

Date Code : Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.

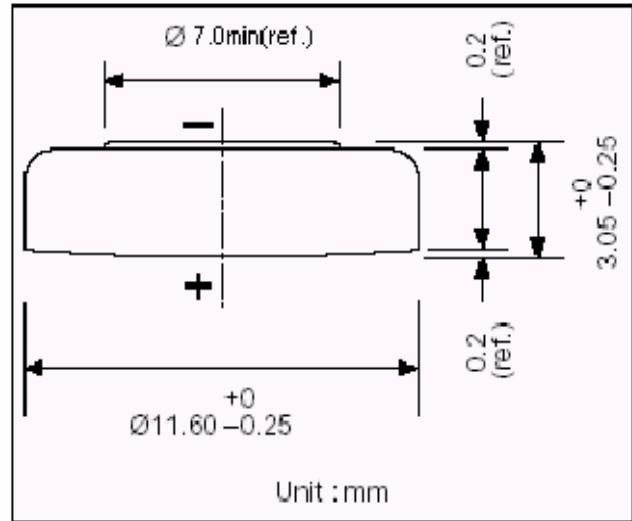


Close Circuit Voltage : 1.30 V(min.) (load resistor 200Ω at 20 ± 2 °C for 1 to 2 seconds)

Nominal Service Life : 130hrs (load $3 \text{ k}\Omega$ to cut off 1.2V under 20 ± 2 °C)

Average Service Capacity : 70mAh (load $3 \text{ k}\Omega$ to cut off 1.2V under 20 ± 2 °C)

Typical Discharge curve at 20 ± 2 °C

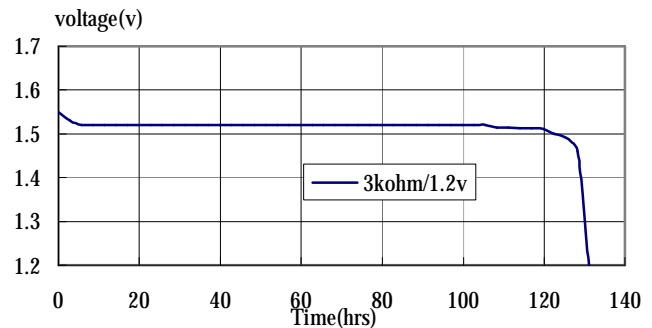

Cross References:

IEC	Maxell	Duracell	Others
SR54	SR1130W	D389	V389