

Model No.: **GP29AF**

Description : Mercury Free & Lead Free
Alkaline High Voltage Multicell

Nominal Voltage : 9Volts

Nominal Dimensions : Ø8.0mm×21.9mm

Terminal : Nickel plated flat contacts - protruded
red(+); recessed black (-)

Jacket : Metal jacket

Internal Connection : Pressure

Applications : Remote controller

Average Weight : 3.5g

Date Code : Unless otherwise specified, each
batteries will carry a numeric year
code and analogue month code (-)

Shelf Life : Not less than 90% of the service
capacity within first year storage
at 20 ± 2 °C 55 ± 20 %RH

Insulation : 5MΩ min.

Resistance



Close Circuit Voltage : 8 Volts (min.)(load resistor 2.4kΩ
at 20 ± 2 °C for 0.1 to 2 seconds)

Current Drain : Under 15mA pulse, 0.5mA
continuous


Nominal Service Life : 34hrs (at 15kΩ load)
(to 4.5V at 20 ± 2 °C)

Average Service : 18mAh(at 15kΩ load)

Capacity
(to 4.5V at 20 ± 2 °C)

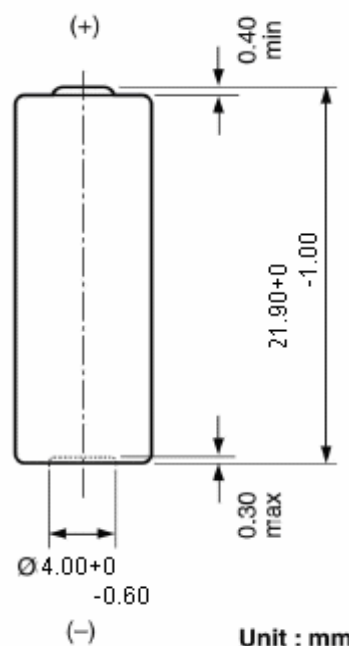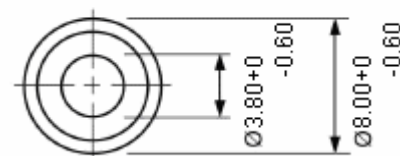

Typical Discharge characteristics at 20 ± 2 °C

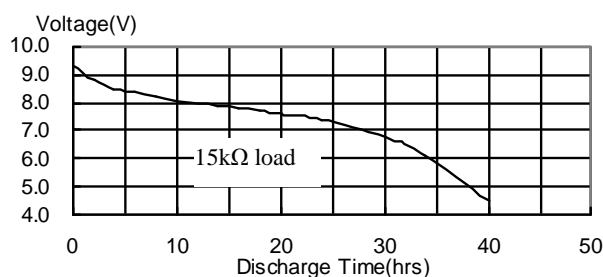

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

Cross References:

GP	Eveready	Duracell	Varta
29AF	---	---	---