

Model No.: **GP476AF**

Description : Mercury Free & Lead Free
Alkaline High Voltage Multicell

Nominal Voltage : 6Volts

Nominal Dimensions : $\varnothing 13.0\text{mm} \times 25.2\text{mm}$

Terminal : Nickel plated flat contacts - protruded
red(+); recessed black (-)

Jacket : Metal jacket

Internal Connection : Pressure

Applications : Electronic toy, photo

Average Weight : 10g

Shelf Life : Not less than 90% of the service capacity within first year storage at $20 \pm 2^\circ\text{C}$ 55 \pm 20 %RH

Insulation : 5M Ω min.

Resistance

Close Circuit Voltage : 5.2 Volts (min.)(load resistor 1K Ω at $20 \pm 2^\circ\text{C}$ for 0.1 to 2 seconds)



Nominal Service Life : 125hrs (at 6k Ω load)

(to 3.6V at $20 \pm 2^\circ\text{C}$)

Average Service Capacity : 105mAh(at 6k Ω load)


Capacity

(to 3.6V at $20 \pm 2^\circ\text{C}$)

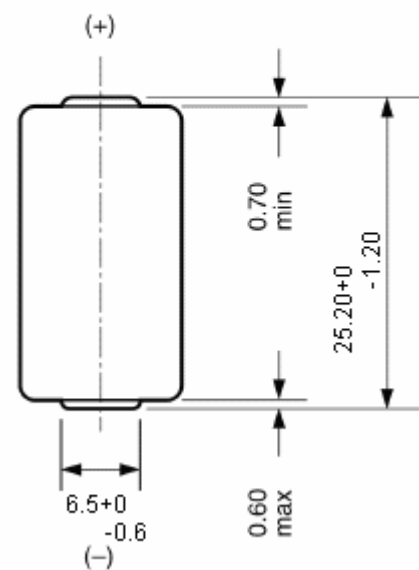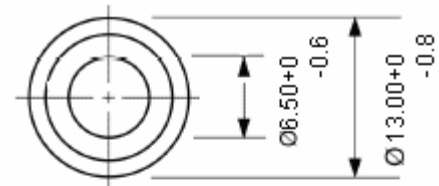

Unit : mm

Typical Discharge characteristics at $20 \pm 2^\circ\text{C}$

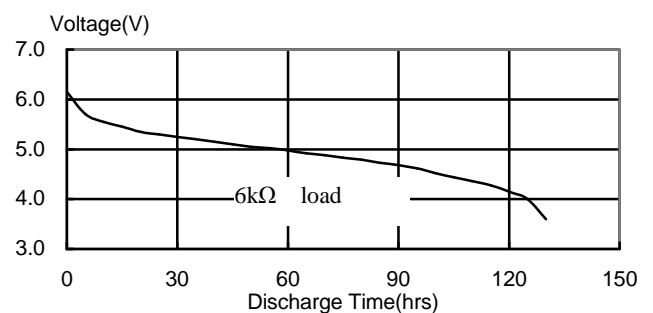

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.