

DATA SHEET


NO MERCURY ADDED				
Description	: Mercury & Cadmium Free Alkaline Manganese Battery 6V Lantern Battery			
Chemical System	: Alkaline Manganese			
Nominal Voltage	: 6.0 Volts			
Nominal Dimensions	: 66 mm x 66 mm x 111 mm			
Terminals	: Coil Spring			
Jacket	: Black Plastic Jacket, Ultrasonic Welded			
Applications	: Lanterns, road lamps and other heavy duty lighting devices			
Shelf Life	: 36 months			
Average Weight	: 690g			

Cross References:


GP	JIS	IEC	Energizer	Duracell
908A	4LR25X	4LR25	528	MN908


Electrical Service:

Discharge Resistance	Discharge Condition	End Point Voltage Life	Service Life
9.1 Ohms	30 mins/ hr 8 hrs/ day	3.6V	24 hrs
8.1 Ohms	30 mins/ day	3.6V	20 hrs
110 Ohms	12 hrs/ day	3.6V	365 hrs

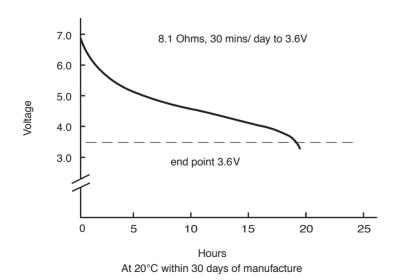

Model No.: GP908A





Unit: mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

www.gpbatteries.com