

NO MERCURY AND CADMIUM ADDED	
Description	: Alkaline Manganese 9V Battery
Chemical System	: Alkaline Manganese Dioxide
Nominal Voltage	: 9.0 Volts
Operating Temp.	: -20°C ~ 60°C, 65% RH Max.
Storage Temp.	: 15°C ~ 25°C, 45% RH ~ 75% RH
Nominal Dimensions	: 25.5(L) x 16.5(W) x 47.5(H)mm
Terminal	: Nickel plated miniature snap fasteners
Jacket	: Printed metal jacket
Internal Connection	: Welding
Application	: All electronic devices
Nominal Weight	: 47g
Date Code	: Unless otherwise specified, every battery will carry a 6-digits month-year (MM-YYYY) expiry code.
Special Feature	: World class explosion proof
Shelf Feature	: 5 Years as below conditions

Cross References:

GP	JIS	IEC	Eveready	Duracell
1604A	6LP3146	6LP3146	522	MN1604

Electrical Characteristics

Test Items	Test Conditions 25±2°C 60±15% RH	Specification (Volt), min			
		3 Months	1 year	3 years	5 years*
OCV		9.30V	9.20V	9.00V	8.80V
CCV	47Ω, 0.3s	8.00V	7.80V	7.50V	7.20V

Discharge Capacity

Test Items	Test Conditions 25 ± 2°C 60±15% RH (EV = End Voltage)	Specification (Hours), mean			
		3 Months	1 year	3 years	5 years*
Duration	270Ω Intermittent 1 h/d EV = 5.4V	20.0	19.7	18.2	16.2
	620Ω Intermittent 2 h/d EV = 5.4V	48.2	47.2	44.7	40.7
	10k Ω background 24 h/d, 620Ω 1 s/h pulse EV = 7.5V	Specification (Days), mean			
		19.0	18.5	17.5	16.5

* Storage performance are estimated.

www.gpbatteries.com


Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.

Copyright© GPI International Ltd. - All rights reserved

Model No.: **GN1604A**

FOR INDUSTRIAL MARKET ONLY

Dimensions

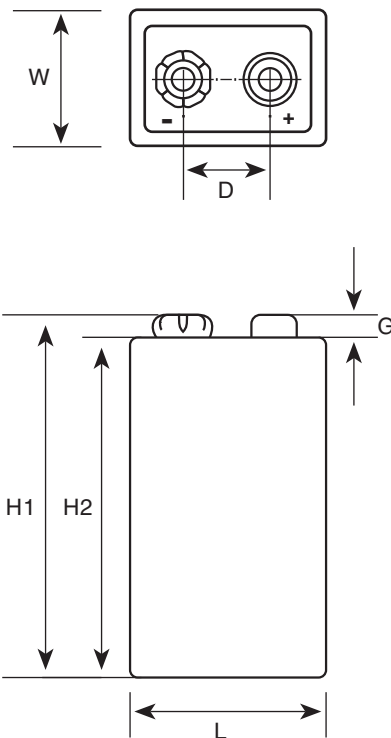

L : 25.5 ± 1.0
W : 16.5 ± 1.0
H1 : 47.5 ± 1.0
H2 : 44.7 ± 1.5
D : 12.7 ± 0.25
G : 1.78mm (Min.)

Unit : mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.