


| | |
|-------------------------|----------------------------------|
| Description | : Lithium Battery |
| Chemical System | : Lithium Manganese Dioxide |
| Nominal Voltage | : 6.0 Volts |
| Nominal Capacity | : 1400mAh @ 10mA to 4.0V at 23°C |
| Dimensions | : 33.8(L) x 16.8(W) x 45.0(H)mm |
| Terminals | : Flat |
| Jacket | : Plastic Case |
| Shelf Life | : 10 years |
| Average Weight | : App. 37g |
| Application | : Photo |

Cross References:

| GP | IEC | Eveready | Duracell |
|------|------|----------|----------|
| 2CR5 | 2CR5 | EL2CR5BP | DL245 |


Model No.: **GP2CR5**

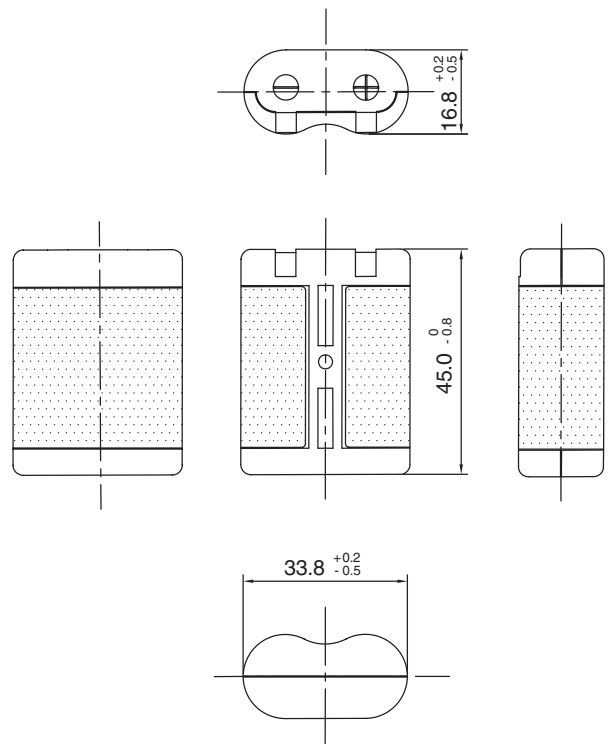


Label Area

Unit : mm


Pulse Discharge Characteristics of 2CR5

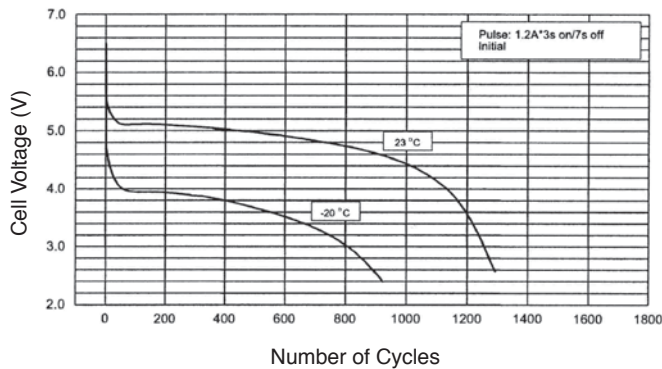

Pulse Discharge Characteristics of 2CR5

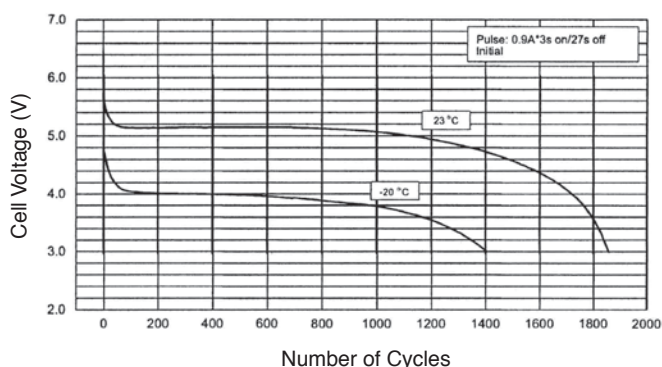

Discharge Characteristics of 2CR5

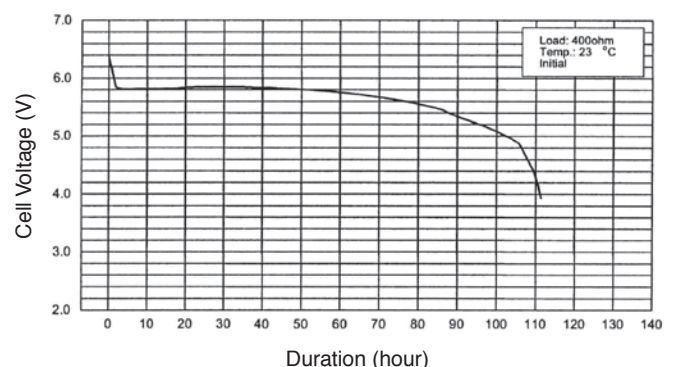

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.