


Description	: Lithium Battery, CR2/3A
Chemical System	: Lithium Manganese Dioxide
Nominal Voltage	: 3.0 Volts
Nominal Capacity	: 1650mAh (Discharge at 2mA to 2.0V at 23°C)
Dimensions	: Ø17 mm x 33.5 mm
Weight	: App. 16g
Shelf Life	: 10 years (23°C ± 2°C)
Max. Constant Current	: 1500mA
Max. Pulse Current	: 3500mA
Operating Temperature	: -40°C to 60°C
Application	: Smoke Detector, Sensors, Home Security Products, Measurement Equipment


Model No.: **GPCR2/3A**

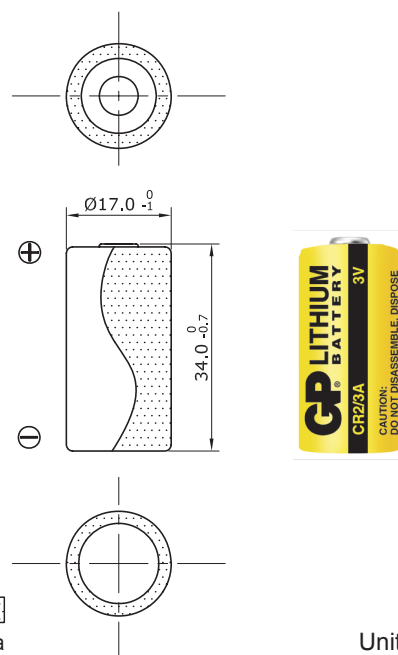


Cross References:

Panasonic	Varta
CR-2/3AZ	CR 2/3A


2mA continuous discharge to 2.0V at 23°C

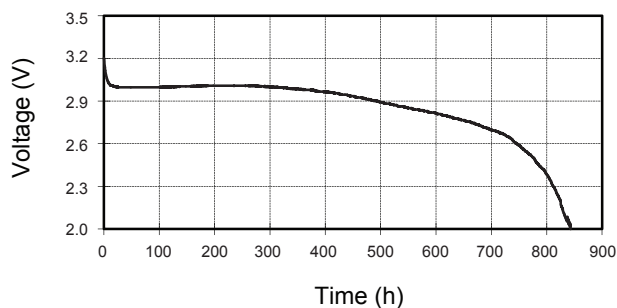


1000Ω pulse discharge at 23°C

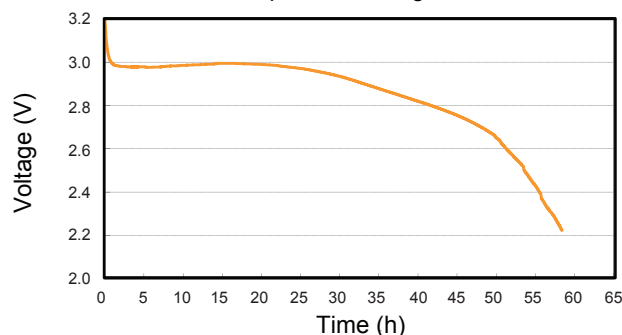

100Ω continuous discharge to 2.0V at 23°C & -20°C

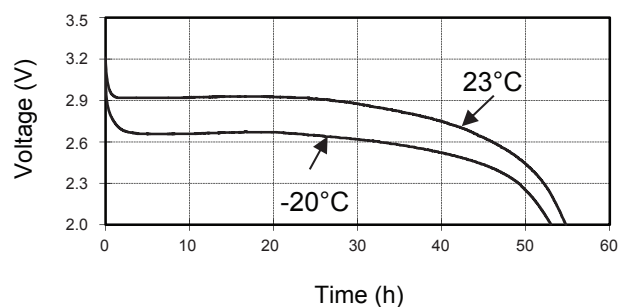

100Ω pulse discharge resistance at 23°C

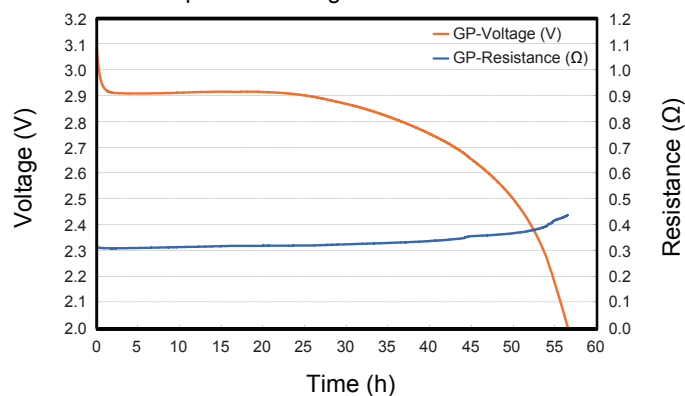

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.